



CAFEMASTER AWC

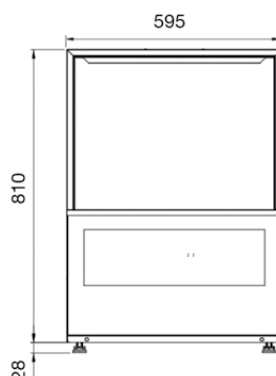

The Cafemaster Advanced Wash Control model is a compact underbench dishwasher with a large focus on environmental sustainability. This proven hardworking machine will produce a sparkling wash time after time.

FEATURES

- **Warranty** – 5 years on the control board, 2 years on parts and labour – 5 years on the entire machine available (conditions apply)
- Compact underbench dishwasher suited for cafes and small restaurants
- Standard warranty – two years on parts and labour with seven on the cabinet
- Cleans up to 600 plates per hour
- 60/120/300sec wash cycle options
- Automatic detergent and rinse aid injection for consistent results and controlled consumption
- Rapid boiler recovery for a faster turn around
- Fit standard with a drain pump allowing easy installation
- Rinse temperature accurately controlled by the thermostop function
- Rear rollers for easy inspection and cleaning
- Double skinned door reducing heat and noise pollution
- High grade stainless steel welded cabinet, wash arms and scrap trays for durability
- Australian made

INCLUSIONS

- 1 x Flat rack insert 500mm x 500mm
- 1 x Plate rack insert 500mm x 500mm
- 1 x Cutlery container
- 1 x Water connection hose
- 2 x Adjustable & 2 x Roller feet
- 2 x Chemical weights & filters
- 1 x Operating manual

TECHNICAL DATA

Height

| | |
|-------------------|--------|
| Cabinet | 810 mm |
| Cabinet inc. legs | 838 mm |
| Usable Wash | 300 mm |

Width

| | |
|---------|--------|
| Cabinet | 595 mm |
|---------|--------|

Depth

| | |
|----------------|---------|
| Cabinet | 660 mm |
| With door open | 1035 mm |

Capacities

| | |
|---------------------|-----------|
| Loads/Hour | up to 30* |
| Water per Cycle | 3L |
| Wash Pump | 370W |
| Wash Tank Litres | 18 |
| Boiler Tank Litres | 6 |
| Element (wash) | 500W |
| Element (boiler) | 3000W |
| Detergent Injection | yes |
| Rinse Aid Injection | yes |

Temperatures

| | |
|-----------------|-------|
| Wash Degrees C | 62 °C |
| Rinse Degrees C | 85 °C |

Plumbing

| | |
|-------|--------------|
| Drain | Pump out |
| Water | ½" BSP (hot) |

Electrical

| | |
|---|--------------|
| Volts/Hz | 240V AC/50Hz |
| Max. Amp. load | 15amps |
| Note: this machine has load shedding capability | |

* Subject to incoming water temperature