

HHT082E

Static holding trolley



CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- Rubber bumpers
- Total thermic insulation with rock or glass wood
- Long lasting front and door seals made up of food glade of high heat resistance
- Removable si de racks to facilitate cleaning
- Static heating provided by low consumption wise heating element that colis up all the chamber
- Snap-shut door
- Mounted on four 125 mm diameter castors, two of witch with brake
- Ergonomic handle for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic control of the temperature
- Operating temperature 30°-120°C
- Two adjustable humidity vents on the door
- Chamber with safety thermostat

STANDARD SUPPLY

• Removable GN 2/1 e GN 1/1 tray racks

OPTIONS & ACCESSORIES


• No







MODULINE foodsinish & foodserve technologies




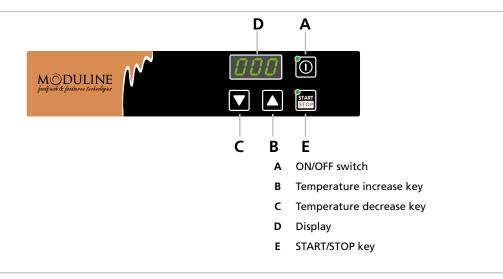

TECHNICAL INSTALLATION DIAGRAM









Model	Overall dimensions (W x D x H) - mm	Trays capacity	Power kW	Power supply
HHT082E	755 x 860 x 1000 h	8xGN2/1 - 16xGN1/1	1,5	AC 230 V / 50 Hz

