

Medical Refrigerations



Exquisite Australia Vaccine refrigeration range has been specifically selected to suit Australian vaccine needs. Over the last few years we have listened to all requests and delivered on what was deemed necessary to assist in making your Pharmacy or Clinic run with ease.

Key Features

Remote Alarm port for external alarm warning



NEW Controller with digital display and Wifi connectivity

*only available on MV30, MV60, MV150



Automatic defrost for easy maintenance

Double glazed glass door with door alarm



Battery backup for controller in case of power outage

Dynamic cooling system with digital controller for precise measurement of the internal temperature

Comply with all QCPP standards



Quality Care Pharmacy Program
An initiative of The Pharmacy Guild of Australia

Medical Refrigerations

Features:

- Digital controller with digital temperature display
- Built in data logger with Wifi connectivity
- Dynamic fan forced cooling system with automatic defrosting
- Double glazed glass door
- White External and Interior Finish
- Internal LED light
- Frequency/voltage: 50Hz/220-240 V
- Leveling adjustable feet
- QCPP approved
- Plastic coated steel shelves
- Battery backup controller
- Refrigerant: R134a
- Ambient temperatures from +16°C to +32°C



MV30




New Controller with Wifi connectivity



Battery backup for controller in case of power outage



Quality Care
Pharmacy Program
An initiative of The Pharmacy Guild of Australia



Gross/Net volume: 30/29 L

Exterior dimensions in mm: 445w x 485d x 535h

Number of shelves: 3

Max. noise level: 50 dB

Temperature range: +2°C to +8°C

Gross/net weight: 29/27 kg

Energy consumption in 24h: 0.8 kWh

MV60




New Controller with Wifi connectivity



Battery backup for controller in case of power outage



Quality Care
Pharmacy Program
An initiative of The Pharmacy Guild of Australia

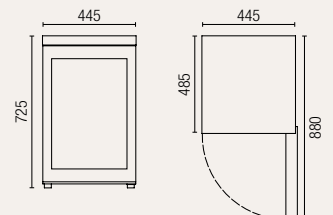

Gross/Net volume: 62/59 L

Exterior dimensions in mm: 445w x 485d x 725h

Number of shelves: 4

Max. noise level: 50 dB

Temperature range: +2°C to +8°C

Gross/net weight: 33/31 kg

Energy consumption in 24h: 0.8 kWh

MV150




New Controller with Wifi connectivity



Battery backup for controller in case of power outage



Quality Care
Pharmacy Program
An initiative of The Pharmacy Guild of Australia

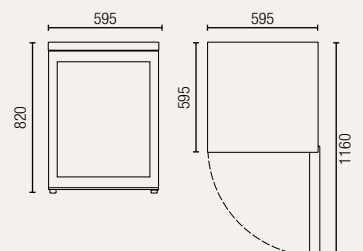

Gross/Net volume: 148/145 L

Exterior dimensions in mm: 595w x 595d x 820h

Number of shelves: 4

Max. noise level: 50 dB

Temperature range: +2°C to +8°C

Gross/net weight: 45/42 kg

Energy consumption in 24h: 1.35 kWh

Medical Refrigerations

Features:

- Digital controller with digital temperature display
- Controller with USB port for data collection
- Dynamic fan forced cooling system with automatic defrosting
- Double glazed glass door
- White External and Interior Finish
- Internal LED light
- Frequency/voltage: 50Hz/220-240 V
- Leveling adjustable feet
- QCPP approved
- Plastic coated steel shelves
- Battery backup controller
- Refrigerant: R134a
- Ambient temperatures from +16°C to +32°C



MV300



Controller with USB port for data collection




Product temperature probe for accurate temperature record



Battery backup for controller in case of power outage

controller with USB port

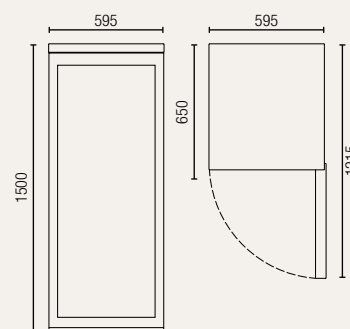

Gross/Net volume: 308/300 L

Exterior dimensions in mm: 595w x 650d x 1500h

Number of shelves: 8

Max. noise level: 55 dB

Temperature range: +2°C to +8°C

Gross/net weight: 78/72 kg

Energy consumption in 24h: 2.9 kWh

MV400



Controller with USB port for data collection




Product temperature probe for accurate temperature record



Battery backup for controller in case of power outage

controller with USB port

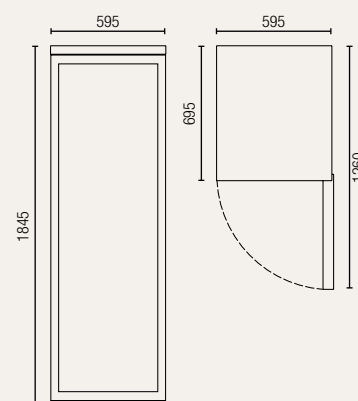

Gross/Net volume: 408/400 L

Exterior dimensions in mm: 595w x 695d x 1845h

Number of shelves: 8

Max. noise level: 65 dB

Temperature range: +2°C to +8°C

Gross/net weight: 92/84 kg

Energy consumption in 24h: 3.1 kWh

Price excluding freight and 10% GST (Goods and Service Tax). Price subject to change without prior notice.

All specifications are subject to change without prior notice