

TOP MOUNT S SERIES

SFT25-1

FEATURES / BENEFITS

■ HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure are foamed-in-place using high density, CFC free polyurethane insulation.

■ HOT GAS CONDENSATE SYSTEM

Through SKIPIO's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but thoroughly prevents the overflow of condensate water.

■ EFFICIENT REFRIGERATION SYSTEM

SKIPIO's refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

■ EXTERIOR & INTERIOR OF CABINET CONSTRUCTION

Stainless steel exterior (galvanized steel top, bottom, and back) and stainless steel with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury.

■ ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ DIGITAL TEMPERATURE CONTROL SYSTEM

It provides precise and constant temperature. This level of precision allows the displayed foods to remain fresh over an extended period of time.




| Model | Swing Door | Capacity (Liters) | Shelves | Compressor (HP) | Amps (A) | Net Weight (Kg) | L X D X H (mm) |
|---------|------------|-------------------|---------|-----------------|----------|-----------------|------------------|
| SFT25-1 | 1 | 574 | 3 | 2/3 | 3.5 | 80 | 640 x 850 x 1926 |

Model: SFT25-1


| SPEC SHEET | SFT25-1 |
|------------------------------|--|
| Classification | Freezer |
| Cabinet Dimension (WxDxH mm) | 640x850x1926 |
| Capacity (Liters) | 574 |
| Inner Temperature | -21°C~-12°C |
| Doors | 1 |
| Number of Shelves | 3 |
| Refrigent | R-404a |
| Compressor (Hp) | 2/3 |
| Cooling Type | Fan cooling type |
| Insulation Type | Polyurethane / Cyclopentane + CFC Free |
| Temperature Control Type | Digital |
| Amps (A) | 3.5 |
| Voltage (V/Hz/Ph) | 240V 50Hz 1Ph |
| Power (W) | 496 |
| Weight (Kg) | 80 |

PLAN VIEW

(unit: mm)

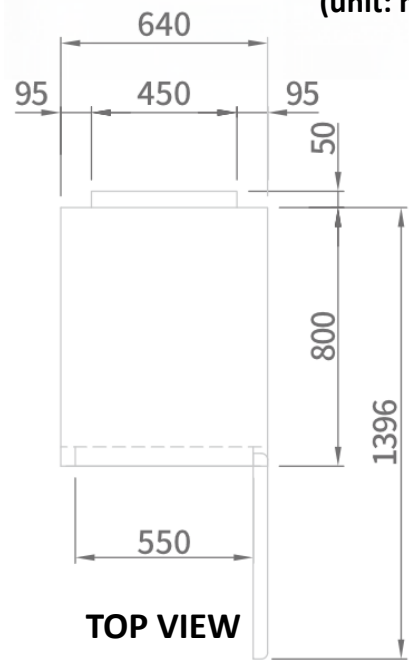

TOP VIEW

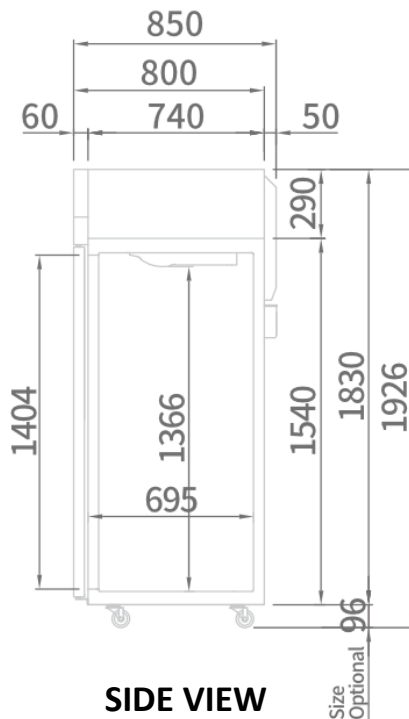

SIDE VIEW

Size Optional 96

WARRANTY **2 YEARS**
PARTS & LABOUR

