
## specifications


## SIF IFI

## **TME1500-A Series**

ActiveCore Series, 3 Door (Glass), Upright Fridge





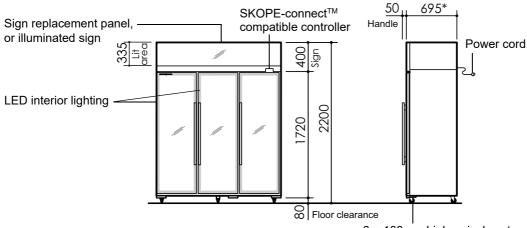

6 × 100mm high swivel castors (2 front lockable) (Ø70 wheel)

**CABINET** 

 Model ID
 TME1500N-A
 TME1500N-AC

 SKOPE ID
 NT15GYN
 NT15BYN

Doors 3 × self-closing, double glazed, double Low-E, argon filled, lockable, argon

filled, toughened safety glass swing doors (hinged LH, RH, RH)

Internal door opening 3 × door openings: 1570mm high × 450mm wide

Shelves 15 × adjustable height wire shelves: 500 wide × 470 deep (5 each side),

570 wide x 470 deep (5 middle)

Sign | Sign replacement panel | Illuminated sign

Material Powdercoat galvanized steel

**PERFORMANCE** 

Max. ambient temp. 43°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior side lighting 3 × 1400mm, 15W LED 3 × 1400mm, 15W LED

Interior shelf lighting n.a n.a.

Sign lighting n.a. 1 × 1590mm, 18W LED

Power cord Supplied with 2.3m, 10 Amp plug and lead

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.4 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect<sup>™</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-

0010)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 250 Watts/335 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2019\ SKOPE\ Industries\ Limited\ and\ property and\ prop$ 



	External	Internal
Height	2200mm	1570mm
Width	1705mm	1605mm
Depth	745mm	554mm
Floor area	1.27m <sup>2</sup>	,
Weight	320kg	
Volume		1497 litres

\* Depth 695mm excludes removable door handle and door lock bracket

illiensional tolerances	l
sefore installing this cabinet allow the following dimensional	l

Less than 1 metre

Bottom

tolerances:			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		

At each joint

±5mm

wore than 1 metre	-5mm to +10mm	+15mm					
Ventilation requirements							
Тор	300mm						
Sides	Not required						

Not required

Not required

PSS0519 Rev. 1.0 Aug. 2019

At each end wall

+15mm



