

Key Features

- ✓ Proven standards of hygiene thanks to digital display of wash and rinse temperatures
- ✓ 3 wash cycles
- ✓ Eco-filter system provides brilliant rinsing results
- ✓ Double walled construction with additional door insulation – reduces heat and noise emissions
- ✓ Wash and rinse systems at top and bottom
- ✓ Deep-drawn wash chamber
- ✓ Wash pump with soft start protects glassware
- Spring balanced door
- ✓ Premium connection kit




See UPster U 500 at wgafoodequip.com.au



Call 02 4228 9733

Technical Specification	echnical Specifications		
Entry height	320 mm		
Dimensions	H 845 mm, W 600 mm, D 600 mm		
Rack Dimensions	500 x 500 mm		
Cycle Times	120/180/240 seconds		
Rack Capacity	Up to 30 racks/hour		
Litres Per Cycle	3.0 Litres		
Tank Capacity in Litres	20.0 Litres		
Power	240V 50Hz, 2.8 kW, 15 amp – Single Phase		
Supply Water	Hot – Max 60 °C		
Standard Racks	1 x universal basket VKV 50/1 1 x basket for small pieces VKV 50/2 BK		

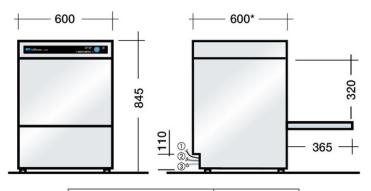

1. Drain	
2. Fresh water connection	300mm above FFL
3. Electrical connection	

