



# UNDER BAR REFRIGERATOR

UBG 1800 / 2400 • UBS 1800 / 2400



MODEL UBG 1800



MODEL UBS 1800

## UNDER BAR REFRIGERATOR

### FEATURES

- HEAVY DUTY STAINLESS STEEL WORK TOP (430)
- OUTSIDE: SATIN STAINLESS STEEL (430) BACK, TOP AND SIDES
- INSIDE: STAINLESS STEEL FLOOR (304), COLOURBOND SIDES AND ROOF
- UNIQUE HALF DOOR GIVES EXTRA CAPACITY
- SELF CLOSING DOORS
- POLYURETHANE PRESSURE INJECTED INSULATION, 40mm WALL THICKNESS, DENSITY DV 33Kg/m<sup>3</sup>
- SUPPLIED ON CASTORS, 2 LOCKABLE, 2 FREE RUNNING
- OPTIONAL FEET AVAILABLE
- MOTOR ON LEFT HAND SIDE
- VENTED FRONT, BACK, AND UNDER CABINET
- EUROPEAN REFRIGERATION UNITS
- AUTO EVAPORATION
- R134a GAS
- FULLY ADJUSTABLE, HEAVY DUTY, PLASTIC COATED SHELVING. (1 SHELF PER FULL DOOR)
- RATED TROPICAL, AMBIENT TEMPERATURE OF 35°C, AT RH 70%
- DUAL THERMOPANE SAFETY GLASS IN GLASS DOOR MODELS
- HEATED DOOR MULLIONS (GLASS DOOR MODEL)
- FLUORESCENT LIGHTING (GLASS DOOR ONLY)

Anvil reserves the right, without notice, to make changes and revisions to product specifications, materials and design, which in our opinion, will provide better performance, durability and efficiency.



ALL ANVIL EQUIPMENT COMES WITH A ONE YEAR WARRANTY ON COMPONENTS AND DEFECTIVE WORKMANSHIP




## UNDER BAR REFRIGERATOR



### NOTE:

When viewing the appliance from the front in its usual operating position, the width of the product is the total distance from left to right ; the depth of the product is the total distance from front to back ; the height is the total distance from the bottom of the product to the top.

### UNDERBAR CABINET DIMENSIONS

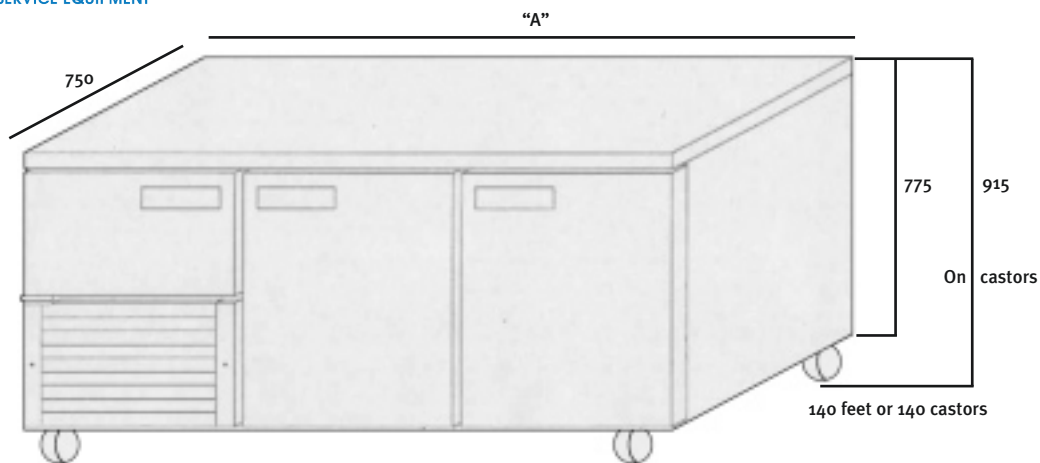

DIMENSIONS "A" - 2½ DOOR - 1780mm  
- 3½ DOOR - 2380mm

DESCRIPTION	MODEL UBG1800/UBS1800	MODEL UBG2400/UBS2400
NUMBER OF DOORS	2 ½	3 ½
DIMENSIONS (mm)	1780 x 750 x 915	2380 x 750 x 915
INTERNAL VOLUME	610lt	886lt
OPERATING TEMPERATURE	2°C - 6°C	2°C - 6°C
AMBIENT TEMPERATURE	35°C at RH 70%	35°C at RH 70%
VOLTAGE	240V - 50HZ	240V - 50HZ
POWER	800 watts/772 watts	820 watts/743 watts
REFRIGERANT	R134a	R134a
WEIGHT	145Kg	175Kg
INSULATION	40mm thick	40mm thick

Note: Output performance figures quoted are dependant on various factors.



Photography by Moshe Rosenzveig • [www.4dphotography.com.au](http://www.4dphotography.com.au)

DISTRIBUTED BY:



[sales@wgafoodequip.com.au](mailto:sales@wgafoodequip.com.au)

020 4228 9733

[sales@wgafoodequip.com.au](mailto:sales@wgafoodequip.com.au)

267 Keira St Wollongong NSW 2500